


Yokohama's GEOLANDAR A/T+II: Get The Next Generation Of SUV And Light Truck Tires – Today

With its on-road manners and off-road attitude, the durable Geolandar A/T+II epitomizes the next generation of SUV and light truck tires.


Deeper Center Grooves

More groove depth in the center of the tread means more traction in mud and snow, providing you with high-speed stability and a longer tread life.



Multi-Step Grooves

This patented, aggressive stepped tread design increases the surface area of the groove for superior on- and off-road grip, as well as excellent wet traction.



Long, Curved Shoulder Blocks

These uniquely shaped shoulder blocks add stability, increase on-road cornering, enhance steering response and result in more even wear on the shoulder.



High-Contact Center Block

The large, high-contact center block mass is comprised of many smaller individual center blocks. These smaller blocks work to reduce noise and enhance handling.




High-Tech Tread Compound

The high-tech tread compound of the Geolandar A/T+II delivers all-season capability and increased durability for longer wear without sacrificing wet or dry traction.



GEOLANDAR A/T+II

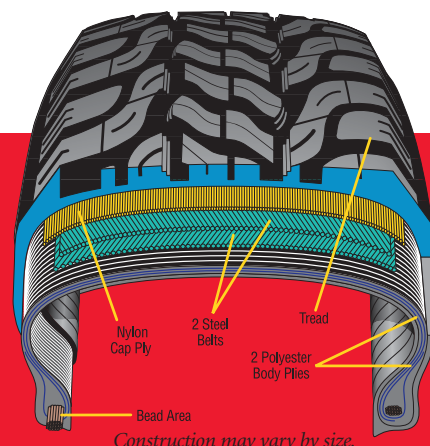

Construction may vary by size.

For Vehicles Such As:

| | |
|--------------------|--------------------|
| Chevrolet Blazer | Isuzu Rodeo |
| Chevrolet K-Series | Jeep Cherokee |
| Chevrolet S-10 | Mitsubishi Montero |
| Dodge Dakota | Nissan Frontier |
| Ford Expedition | Nissan Pathfinder |
| Ford Explorer | Toyota 4Runner |
| Ford F-Series | Toyota Tacoma |
| Ford Ranger | And Others |
| Honda Passport | |

Yokohama 30-Day Performance Promise

- Test drive Geolandar A/T+II for 30 days. If you are not completely satisfied, bring them back for a full refund.*
- 40,000 Mile Limited Treadwear Warranty.*

**See dealer for details.*




YOKOHAMA

GEOLANDAR A/T+ II

| Tire Size | Part Number | UTQG | Rim Width | | Inflated Dimensions | | Tread Width (Inches) | Tread Depth (32/Inches) | Loaded Dimensions | | Maximum Load at Cold Inflation Pressure lbs. @ psi |
|----------------------|-------------|---------|------------------------------|-----------------------------|------------------------|---------------------------|----------------------|-------------------------|------------------------|----------------|--|
| | | | Measuring Rim Width (Inches) | Approved Rim Width (Inches) | Overall Width (Inches) | Overall Diameter (Inches) | | | Static Radius (Inches) | Revs. Per Mile | |
| P225/70R15 100S | 01152 | 360/B/B | 6.5 | 6.0 - 7.5 | 9.0 | 27.6 | 7.0 | 12 | 12.4 | 751 | 1753@35 |
| P235/75R15 108S | 01153 | 360/B/B | 6.5 | 6.0 - 8.0 | 9.3 | 28.8 | 7.3 | 12 | 12.9 | 721 | 2183@41 |
| P235/70R16 104S | 01154 | 360/B/B | 7.0 | 6.0 - 8.0 | 9.6 | 29.1 | 7.3 | 12 | 13.1 | 713 | 1984@35 |
| 245/70R16 107S | 01159 | 360/B/B | 7.0 | 6.5 - 8.0 | 9.7 | 29.7 | 7.6 | 13 | 13.3 | 700 | 2149@35 |
| P255/70R16 109S | 01155 | 360/B/B | 7.5 | 6.5 - 8.5 | 10.4 | 30.3 | 8.0 | 13 | 13.6 | 686 | 2271@35 |
| P265/70R16 111S | 01156 | 360/B/B | 8.0 | 7.0 - 9.0 | 10.9 | 30.7 | 8.3 | 13 | 13.7 | 676 | 2403@35 |
| 245/65R17 107H | 01160 | 360/B/A | 7.0 | 7.0 - 8.5 | 9.8 | 29.6 | 7.6 | 12 | 13.4 | 702 | 2149@44 |
| P265/70R17 113S | 01158 | 360/B/B | 8.0 | 7.0 - 9.0 | 10.8 | 31.9 | 8.3 | 13 | 14.3 | 652 | 2535@35 |
| P275/65R17 113H | 01157 | 360/B/A | 8.0 | 7.5 - 9.5 | 10.9 | 31.3 | 8.6 | 13 | 14.1 | 663 | 2535@35 |
| LT215/75R15 100S (C) | 01140 | - | 6.0 | 5.5 - 7.0 | 8.5 | 28.0 | 6.7 | 17 | 13.0 | 748 | 1765@50 |
| LT235/75R15 104S (C) | 01141 | - | 6.5 | 6.0 - 7.0 | 9.3 | 29.2 | 7.3 | 17 | 13.5 | 712 | 1985@50 |
| LT215/85R16 110S (D) | 01145 | - | 6.0 | 5.5 - 7.0 | 8.7 | 30.6 | 6.3 | 17 | 14.2 | 684 | 2335@65 |
| LT225/75R16 110S (D) | 01142 | - | 6.0 | 6.0 - 7.0 | 8.9 | 29.6 | 7.0 | 17 | 13.8 | 707 | 2350@65 |
| LT235/85R16 120S (E) | 01151 | - | 6.5 | 6.0 - 7.0 | 9.4 | 31.9 | 7.3 | 17 | 14.8 | 656 | 3042@80 |
| LT245/75R16 120S (E) | 01150 | - | 7.0 | 6.5 - 7.5 | 9.8 | 30.8 | 7.6 | 17 | 14.3 | 679 | 3042@80 |
| LT265/75R16 119S (D) | 01143 | - | 7.5 | 7.0 - 8.0 | 10.7 | 31.8 | 8.3 | 16 | 14.7 | 658 | 3000@65 |
| LT285/75R16 122Q (D) | 01144 | - | 8.0 | 7.5 - 9.0 | 11.6 | 33.0 | 8.9 | 18 | 15.2 | 633 | 3305@65 |
| LT315/75R16 113Q (C) | 01139 | - | 8.5 | 8.0 - 10.0 | 12.4 | 34.5 | 9.8 | 19 | 15.9 | 605 | 2535@35 |
| 30X9.50R15 104S (C) | 01146 | - | 7.5 | 6.5 - 8.5 | 9.7 | 29.8 | 7.6 | 18 | 13.8 | 697 | 1985@50 |
| 31X10.50R15 109S (C) | 01147 | - | 8.5 | 7.0 - 9.0 | 10.7 | 30.7 | 8.3 | 19 | 14.2 | 680 | 2250@50 |
| 32X11.50R15 113S (C) | 01148 | - | 9.0 | 8.0 - 10.0 | 11.5 | 31.8 | 9.1 | 19 | 14.6 | 654 | 2530@50 |
| 33X12.50R15 108S (C) | 01149 | - | 10.0 | 8.5 - 11.0 | 12.8 | 32.6 | 9.9 | 19 | 15.0 | 637 | 2225@35 |

GEOLANDAR A/T+ II Features & Benefits

| Feature | Multi-Step Grooves | High-Contact Center Block | Long, Curved Shoulder Blocks | Side Protectors | Deeper Center Grooves | High-Tech Tread Compound | Variable Depth Shoulder Groove |
|----------------|--|---|--|---|--|---|---|
| Benefit | Increase the surface area of the groove for superior on- and off-road grip, as well as excellent wet traction. | More rubber-to-road contact for increased stability at high speeds, enhanced handling, and noise reduction. | Allow for smoother contact with the ground for improved noise reduction. | Help resist side cuts from rocks, ruts and rough terrain. | Improve traction in mud & snow and provide high speed stability. | Increases durability for longer wear without sacrificing wet or dry traction. | Provides greater stability, improved handling, and even wear. |

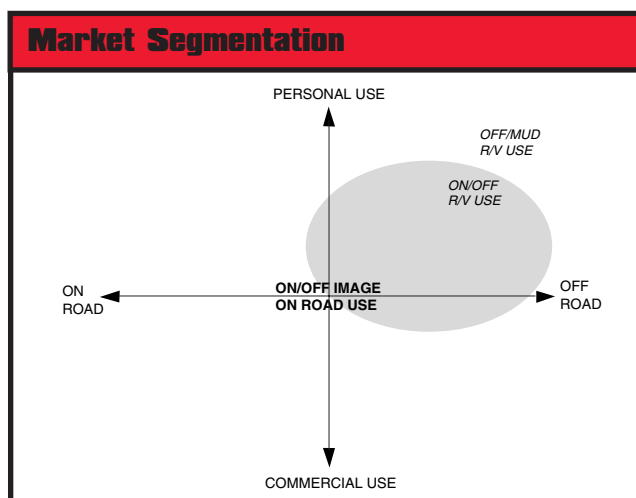

Consumer Affairs: 1-800-722-9888
 Corporate Headquarters: Fullerton, CA 714-870-3800, 1-800-423-4544
 Visit our Web site at: www.yokohamatire.com