



Refit

20. Position centre console assembly, ensuring harnesses and connectors are not trapped and are routed to their correct locations.
21. Connect cigar lighter multiplug and illumination bulb Lucar.
22. Align centre console to body fixings and fascia.
23. Fit and tighten screws securing centre console to body.
24. Lubricate hand brake lever to cable clevis pin.
25. Align hand brake cable to lever, fit clevis pin and secure with clip.
26. Secure hand brake lever gaiter to centre console.

Models fitted with electric front seats

27. Position electric front seat switches, connect multiplugs and secure to centre console.

All models


28. Position centre console switch pack and connect multiplugs to switches.
29. Align switch pack to centre console and secure with screws.
30. Fit centre console switch pack cover.
31. Fit centre console rubber mat.
32. Fit gear selector lever knob and secure gaiter.
33. Fit transfer gear lever knob and secure gaiter.
34. Reconnect battery earth lead.

DRINKS TRAY

Service repair no - 76.46.41

Remove

1. Disconnect battery negative lead.
2. Remove ash tray. **See ash tray - dash panel central louvre panel.**
3. Remove switch pack. **See switch pack - dash panel central louvre panel.**

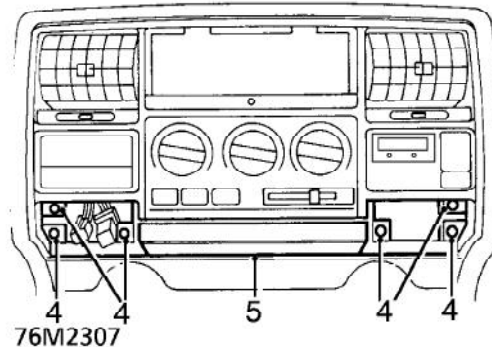

4. Remove 6 screws securing drinks tray to dash panel central louvre panel.
5. Remove drinks tray.

Refit

6. Position drinks tray to dash panel central louvre panel and secure with screws.
7. Fit switch pack. **See switch pack - dash panel central louvre panel.**
8. Fit ash tray. **See ash tray - dash panel central louvre panel.**
9. Connect battery negative lead.